


**Ocean Engineering Technical Data Sheet**  
**VRB-25 Rotating Beacon—Vibration Isolation**

When the VRB-25 rotating beacon is installed on a structure prone to vibration, either due to wind, currents, ice, or a co-located electronic sound signal, it is necessary to install vibration isolation grommets between the beacon and the structure.

Suitable grommets are “Army-Navy Grommets,” PN 9307K27 (50 per package), available from McMaster Carr Supply Company, (908) 329-3200. Government Credit Cards are accepted.

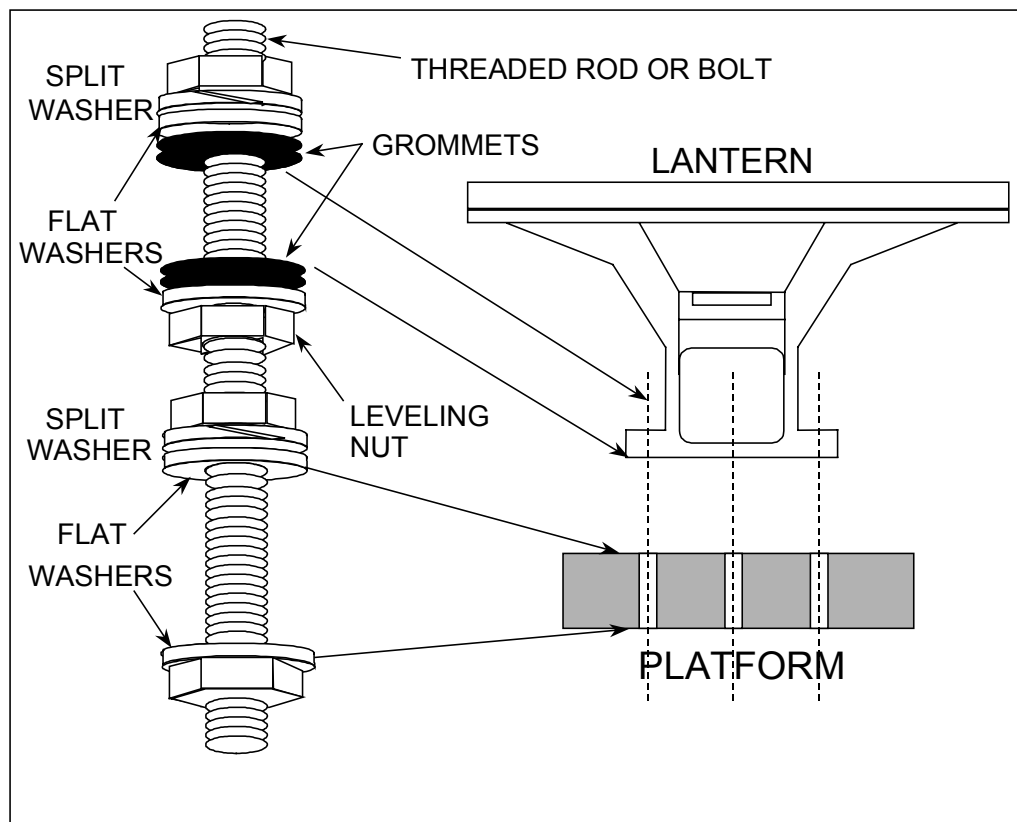

For further information or assistance the Signal & Power Team POC is Mr. Carl K. Andersen, 202-267-1872, [candersen@comdt.uscg.mil](mailto:candersen@comdt.uscg.mil)